






Working Height Max. 15.7 / 8 m (51'6" / 26'3")
Overall Lift Capacity Max. 250 kg (551 lb)
Overall Width 1.25 m (4'1")
Overall Length 2.84 m (9'4")
Overall Weight 3,280 kg (7,231 lb)

LS1412H

Electric Scissor Lifts H-Drive

LS1412H SPECIFICATIONS >>>

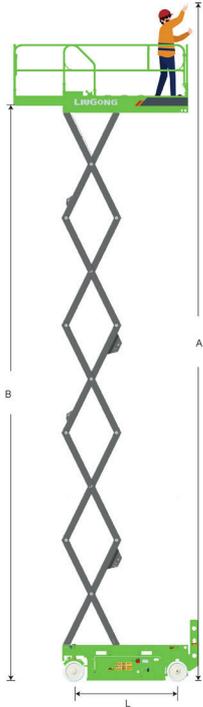

DIMENSIONS

A. Working Height Max. (Indoor/Outdoor)	15.7 / 8 m (51'6" / 26'3")
B. Platform Height Max.(Indoor/Outdoor)	13.7 / 6 m (44'11" / 20')
C. Platform Height (Stowed)	1.48 m (4'10")
D. Platform Length	2.64 m (8'8")
E. Platform Width	1.16 m (3'10")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	2.84 m (9'4")
H. Overall Length (Without Ladder)	2.64 m (8'8")
I. Overall Width	1.25 m (4'1")
J. Stowed Height (Rails Up)	2.62 m (8'7")
K. Stowed Height (Rails Down)	2.055 m (6'9")
L. Wheelbase	2.22 m (7'3")
M. Ground Clearance (Pothole Raised)	100 mm (4")
N. Ground Clearance (Pothole Deployed)	20 mm (0.8")

PRODUCTIVITY

Overall Lift Capacity Max. Extension Deck	250 kg (551 lb)
Capacity Platform Occupancy Max.	113 kg (249 lb)
(Indoor/Outdoor) Drive Speed (Stowed) Drive	2 / 1
Speed (Raised) Turning Radius (Inside/Outside)	4 km/h (2.5 mph)
Lift/Lower Time Gradeability Tilt Sensor Activation	0.7 km/h (0.4 mph)
(Side to Side/Front to Back) Tire Size (Solid Non-marking)	80 / 67 s
	25 %
	X 2.5° / Y 3°
	381 x 127 mm (1'3" x 5")

POWER

Battery	24V / 270 Ah
Lithium Battery (Optional)	24 V / 230 Ah
Charger	24 V / 30 A
Lifting Motor	24 V / 3.3 kW
Hydraulic System Volume	25 L (6 gal 4 pt)
Hydraulic Tank Capacity	20 L (5 gal 2 pt)

WEIGHT

Overall Weight	3,280 kg (7,231 lb)
----------------	---------------------



**SALES
RENTAL**

Tel.081-526-3995

